

**4" Square Super Thin Recessed LED 13.5W**



**Type IC, Wet & Air-Tight**

**DESCRIPTION**

4" Square Recessed LED With Integral Driver In Connection Box  
Fits Where No Other Recessed Fixture Can


**FEATURES & BENEFITS**

- 1/2" Deep - Install Directly Under Joists, Maximum Layout Flexibility
- Driver Inside Connection Box - No Junction Box Needed
- Fast & Easy To Install - Save On Labor
- Type IC Rated - No Housing Required

**MOUNTING**

Cut Hole In Ceiling And Snap Fixture In Opening With Attached  
Spring Clips. Ceiling Clearance Required For Driver: 2"

**DIMENSIONS:** ID 4 1/8" OD 4 3/4" SQ Cut Out 4 1/8" to 4 1/4"

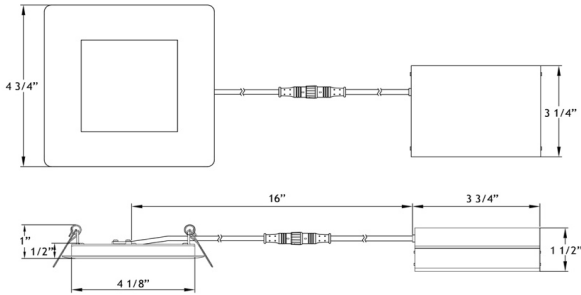

120V TRIAC Dimmable  
Driver Included

Optional 120V - 347V  
Driver 0-10V Dimmable



Order Separately as  
Cat # LLL-LD1535T

**AVAILABLE TRIMS**



White



Black

**ORDERING GUIDE** Example: **LL4S - 30K - WH**

LL4S	CCT	Trim Finish	
2700K	<b>27K</b>	<b>WH</b>	White
3000K	<b>30K</b>	<b>BK</b>	Black
4000K	<b>40K</b>		

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Recessed Ceiling, Showers & Soffits
Energy Used	13.5 W
Colour Temperature	2700   3000   4000
Light Output	800   850   950
Halogen Equivalent	90 W
Beam Angle	110°
CRI	80
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Power Factor	0.95
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star
Warranty	10 Year on Residential 5 Year on Commercial Applications

**ACCESSORIES**

Sold Separately



Low Voltage Extension Cables  
6ft - cat # **EXC6**, 20ft - cat # **EXC20**  
Max 40 ft Allowed. FT4 / CMR rated



26" Flat Rough-In Plates - cat # **RIP4**



13" Flat Rough-In Plate - cat # **MP4-2**



Flanged Rough-In Plate - cat # **FRP4**

**COMPLIANCE**



**Type IC  
Air-Tight**